



terrazzo



terrazzo



Terrazzo tegels, tegels met uitstraling!

Het resultaat: een uitzonderlijk design dat past bij verschillende interieurtrends.

Carrelages Terrazzo, carrelages de style!

Le résultat: un design exceptionnel qui se marie parfaitement aux différentes tendances d'intérieur.

Terrazzo tiles, stylish tiles!

The result: an exceptional design that fits perfectly in different interior design trends.

Terrazzo Fliesen, Fliesen mit besondere Ausstrahlung!

Das Ergebnis: ein außergewöhnliches Design, das sich perfekt in verschiedene Interieur-Design-Trends fügt.


Piastrelle terrazzo, piastrelle splendenti!

Il risultato: un design eccezionale che si adatta perfettamente in diverse tendenze del interior design.

terrazzo

lecce

60x60 cm - 24"x24" inches naturale/lucidato

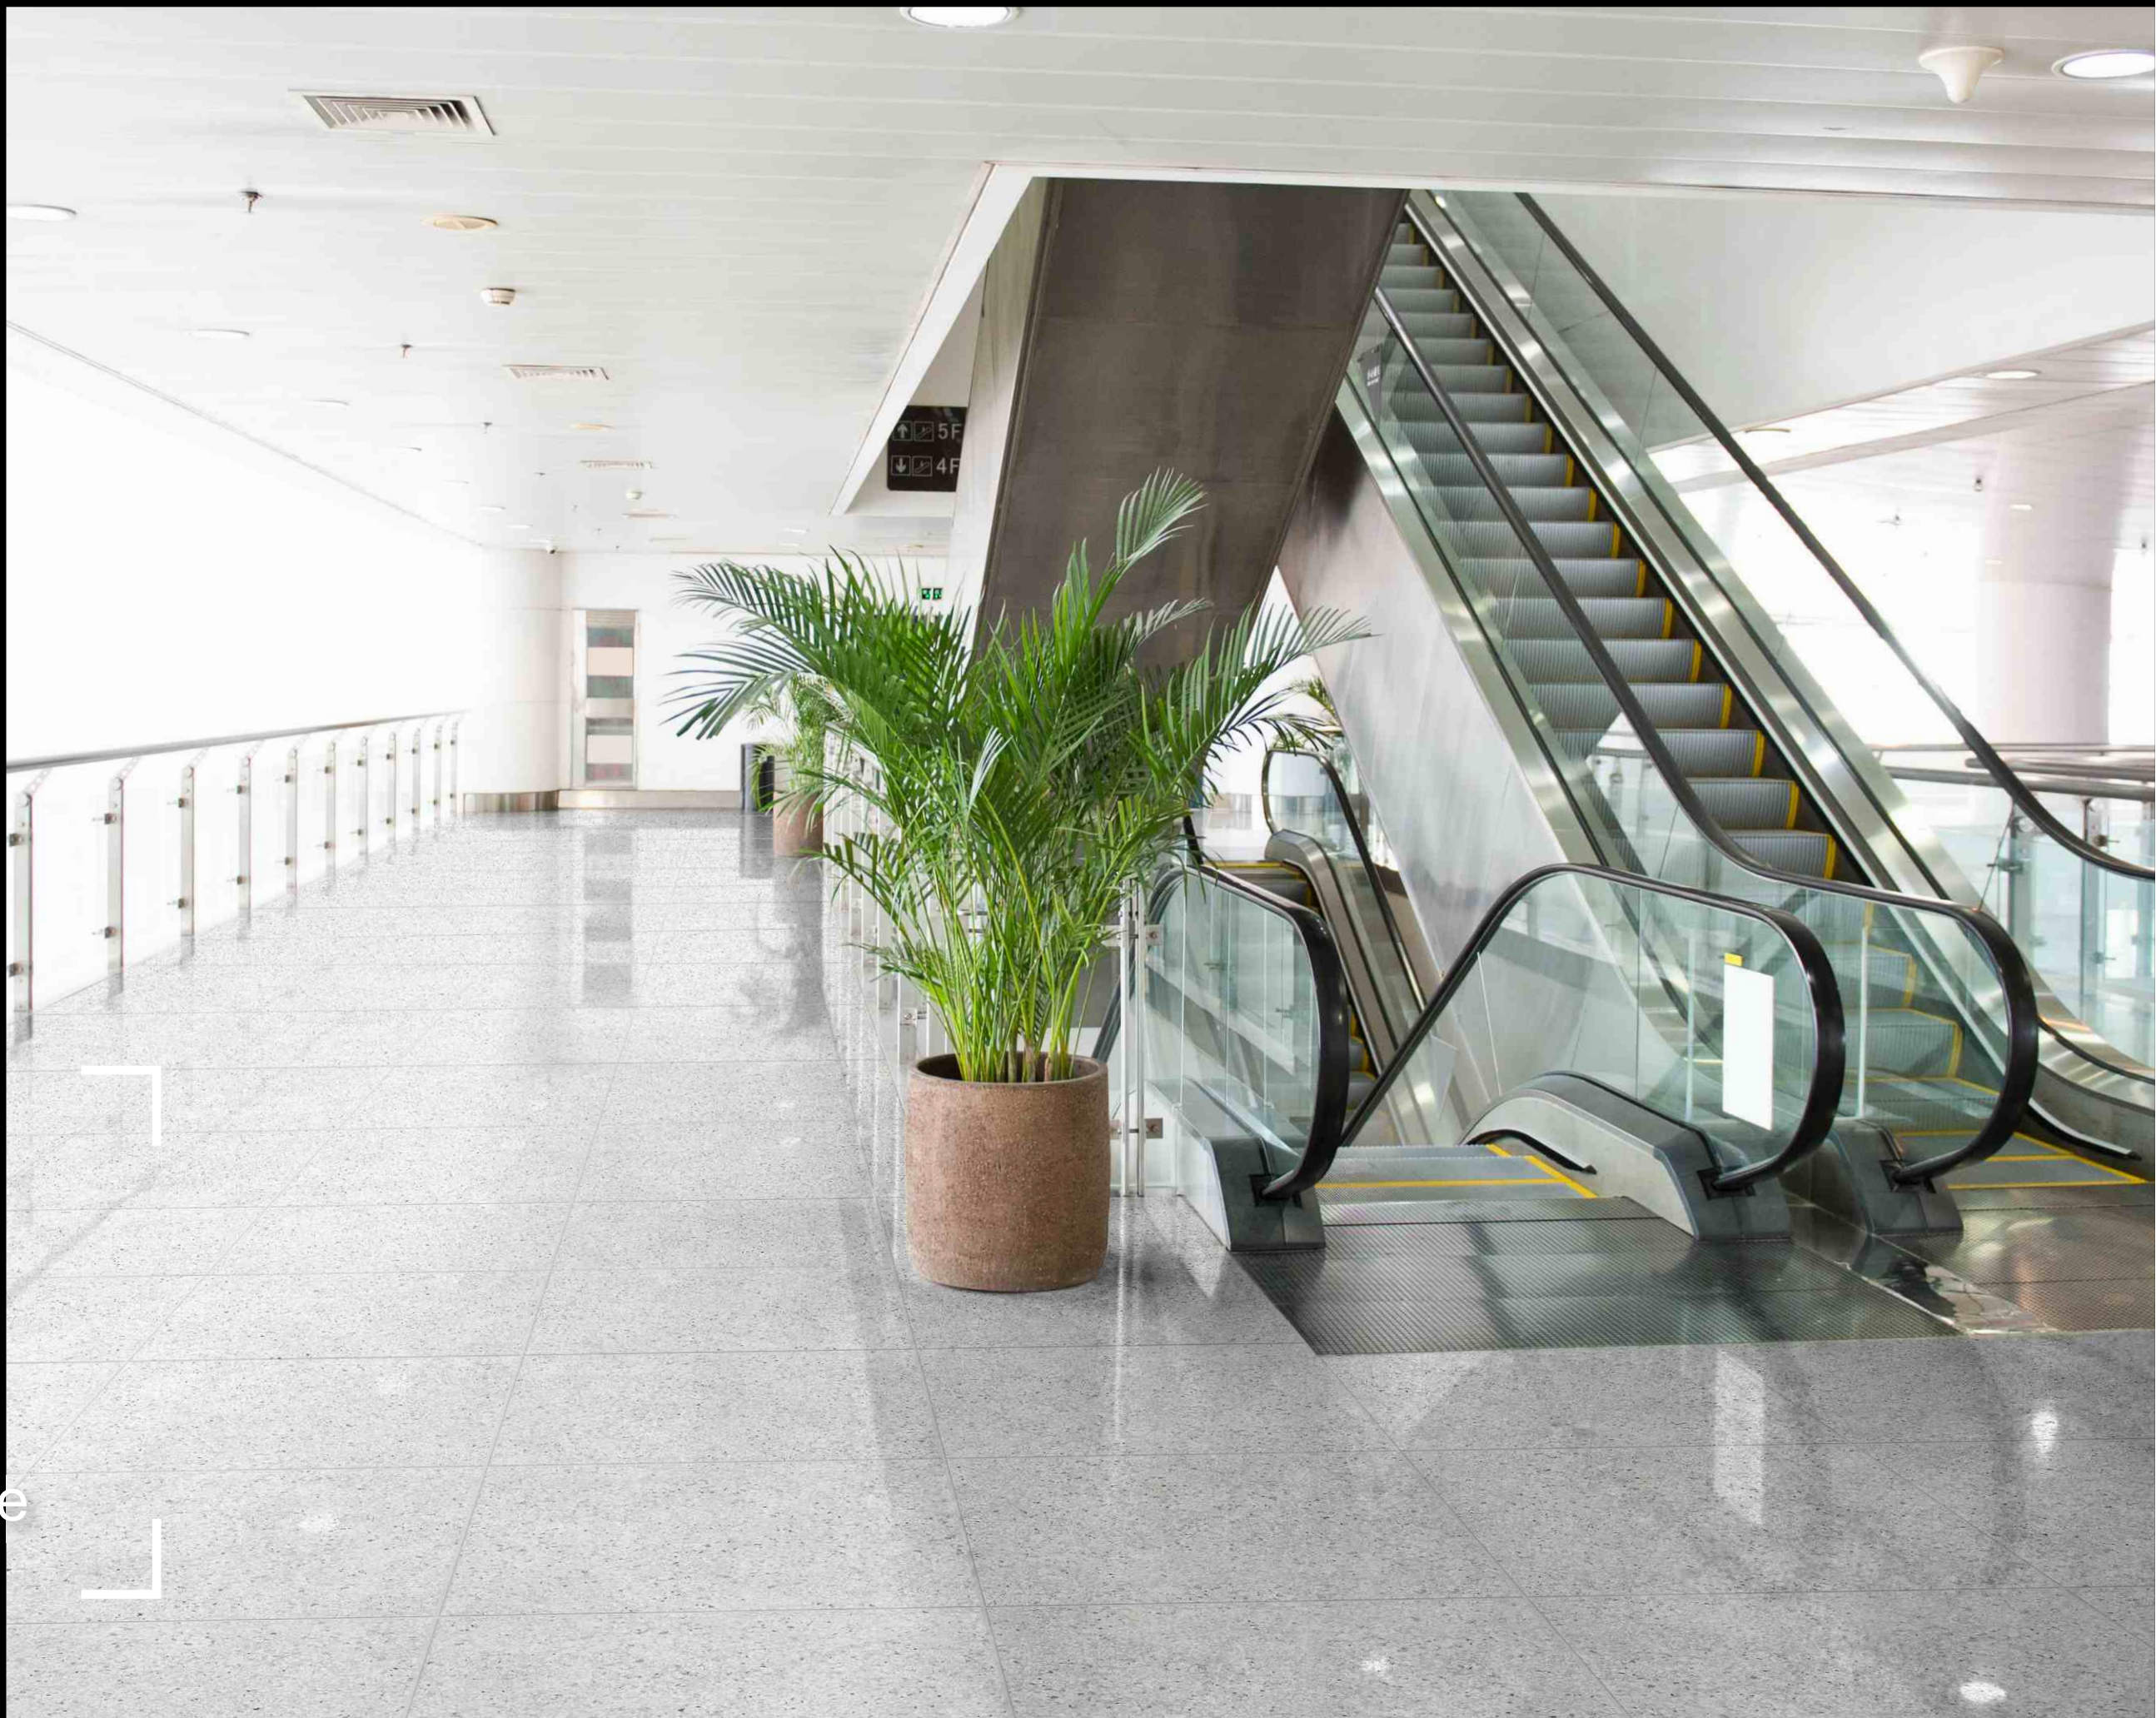

terrazzo lecce

60x60 cm - 24"x 24" inches lucidato



terrazzo lecce

60x60 cm - 24"x 24" inches naturale

terrazzo

foggia

60x60 cm - 24"x24" inches naturale/lucidato



terrazzo foggia
60x60 cm - 24"x 24" inches naturale



terrazzo foggia
60x60 cm - 24"x24" inches lucidato

terrazzo

terni

60x60 cm - 24"x24" inches naturale/lucidato



terrazzo terni
60x60 cm - 24"x 24" inches naturale


terrazzo

prato



60x60 cm - 24"x24" inches naturale/lucidato



terrazzo prato
60x60 cm - 24"x24" inches lucidato

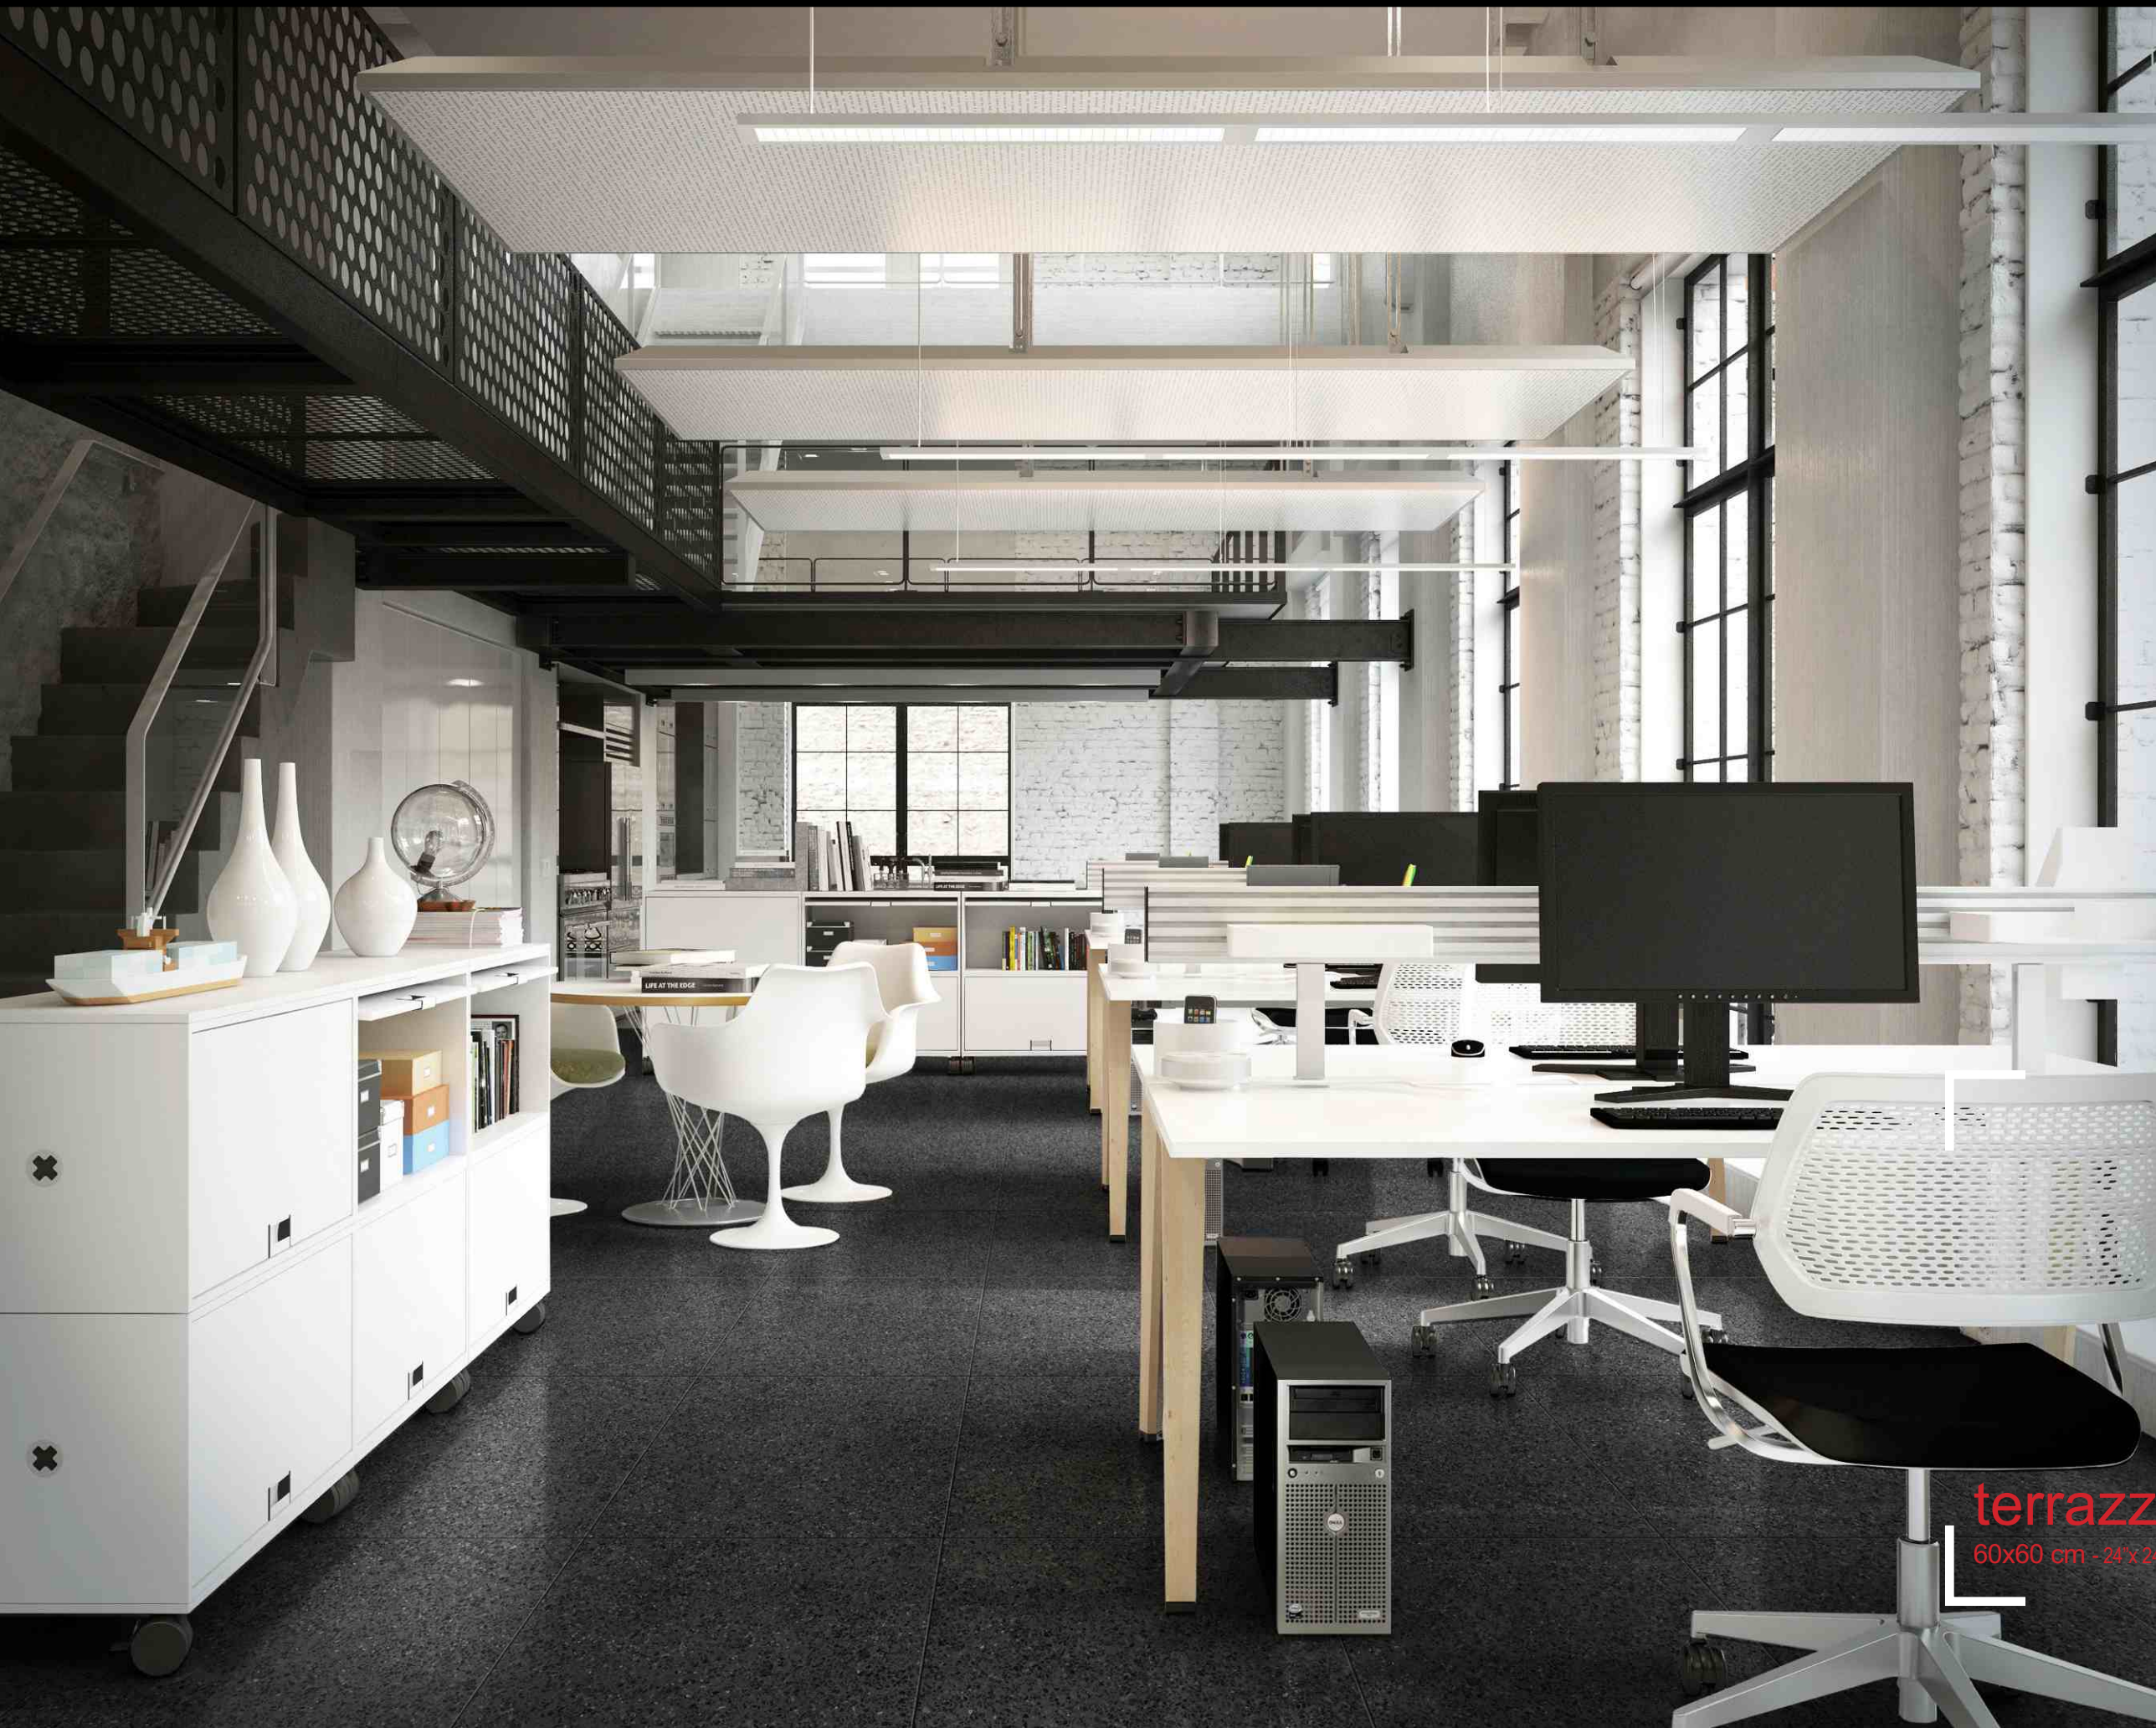

terrazzo prato
60x60 cm - 24"x24" inches naturale

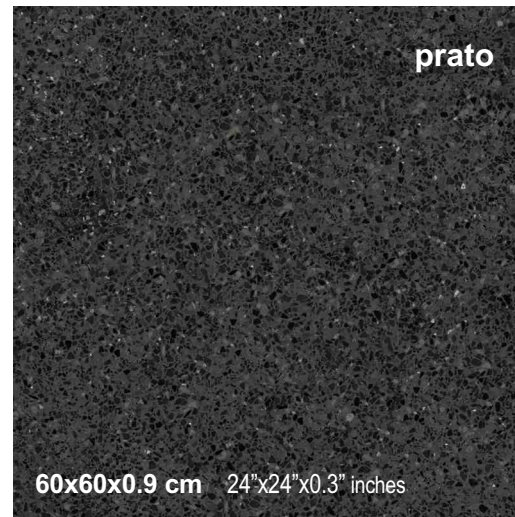

V1
Homogene kleurtoon
Ton homogène
Uniform tone
Im Farbton homogen
Omogeneo nel tono





terrazzo























pcs/box m²/box m²/pallet kg/m²
















	60x60x0.9 cm 24"x24"x0.3" inches naturale. rect. R10	TS RVT660	TS RVT661	TS RVT662	TS RVT663	4	1,44	51,84	20
	60x60x0.9 cm 24"x24"x0.3" inches lucidato. rect.	TS RVTL660	TS RVTL661	TS RVTL662	TS RVTL663	4	1,44	51,84	20
Plinten Plinthes Skirtings Sockel Battiscopa									
	7x60 cm 2.7"x24" inches naturale. rect.	TS RVT660P	TS RVT661P	TS RVT662P	TS RVT663P	18			
	7x60 cm 2.7"x24" inches lucidato. rect.	TS RVTL660P	TS RVTL661P	TS RVTL662P	TS RVTL663P	18			



		Reference Standard: EN 14411: 2012 Ceramic Floor and Wall Tiles: Definitions, Classification, Characteristics and Marking
		Product Type: Dry Pressed : Group B I UGL U4P4 E3C2
		Touchstones: Full Body Porcelain Tiles TERRAZZO NATURALE
		Use: Internal and External Wall and Floor Tiles

TEST METHODS		STANDARD AND TEST VALUE		DECLARED VALUES
	Length and Width	ISO 10545-2	± 0,5%	± 0,2%
	Deviation of mean thickness from manufacturing thickness		± 5%	± 5%
	Straightness of the edges		± 0,5%	± 0,3%
	Orthogonality		± 0,6%	± 0,3%
	Surface Flatness		± 0,5%	± 0,3%
	Surface quality (% defect free)		≥ 95%	Compliant
	Water Absorption	ISO 10545-3	≤ 0,5%	< 0,05%
	Breaking strength (N) Thickness	ISO 10545-4	≥ 1300	> 2000
	Bending strength (N/mm ²)		> 35	> 45
	Resistance to deep abrasion (removed Volume/mm ³)	ISO 10545-6	< 175	< 160
	Coefficient of Linear Thermal expansion (with atmospheric temperature up to 100 °C)	ISO 10545-8	Test method available	≤ 8,0x10 ⁻⁶ / °C
	Resistance to Thermal shock	ISO 10545-9	Required	Resistant
	Resistance to frost	ISO 10545-12	Required	Without visible defects
	Resistance to Acids and high concentrations Bases	ISO 10545-13	The producer declares the classification	Test available
	Resistance to Acids and low concentrations Bases			Class ULA
	Resistance to household chemicals and swimming pool water additives			Min. Class UB
	Resistance to staining	ISO 10545-14	Test method available	Min. Class 4
	Antislip Resistance (With shoes)	DIN 51130	Máx. R13	R10
	Antislip Resistance	DIN 51097	Máx. C	A
	Antislip Resistance	EN 13036-4	Test method available	Test available
	Resistance to heavy shock	UPEC CSTB	Level 0 to 5	Level 3
	Reaction to fire	Decision 96/603/CE	A1 _{FL}	Class A1 _{FL}

		Reference Standard: EN 14411: 2012 Ceramic Floor and Wall Tiles: Definitions, Classification, Characteristics and Marking
		Product Type: Dry Pressed : Group GL
		Touchstones: Glazed Porcelain Tiles - TERRAZZO LUCIDATO
		Use: Internal and External Wall and Floor Tiles

TEST METHODS		STANDARD AND TEST VALUE		DECLARED VALUES
	Length and Width	ISO 10545-2	± 0,5%	± 0,1%
	Deviation of mean thickness from manufacturing thickness		± 5%	± 5%
	Straightness of the edges		± 0,5%	± 0,2%
	Orthogonality		± 0,6%	± 0,2%
	Surface Flatness		± 0,5%	± 0,2%
	Surface quality (% defect free)		≥ 95%	Compliant
	Water Absorption	ISO 10545-3	<0,5%	< 0,05%
	Breaking strength (N) Thickness	ISO 10545-4	> 1300	> 1500
	Bending strength (N/mm ²)		> 35	> 40
	Resistance to abrasion (Glazed)	ISO 10545-7	PEI Groups II - III - IV - V	PEI IV
	Coefficient of Linear Thermal expansion (with atmospheric temperature up to 100 °C)	ISO 10545-8	Test method available	≤ 8,0x10 ⁻⁶ / °C
	Resistance to Thermal shock	ISO 10545-9	Required	Resistant
	Cracking resistance (Glazed)	ISO 10545-11	Required	Resistant
	Resistant to frost	ISO 10545-12	Required	Without visible defects
	Resistance to Acids and high concentrations Bases	ISO 10545-13	The producer declares the classification	Test available
	Resistance to Acids and low concentrations Bases			Class GLA
	Resistance to household chemicals and swimming pool water additives			Min. Class GB
	Resistance to staining	ISO 10545-14	Min. Class 3	Min. Class 3
	Reaction to fire	Decision 96/603/CE	A1 _{FL}	Class A1 _{FL}

Touchstones behoudt het recht om, indien nodig, technische en formele wijzigingen aan te brengen aan de in de catalogoog vermelde informatie.


Touchstones se réserve le droit d'apporter, si nécessaire, des modifications techniques et formelles aux information présentes dans ce catalogue.

Touchstones reserves the right to modify technical and formal details included in the catalogue.


Touchstones behält sich ausdrücklich das Recht vor, technische Änderungen vorzunehmen.

Touchstones si riserva di diritto di apportare qualora lo ritenesse opportuno, eventuali modifiche tecniche e formali ai dati riportati in questo catalogo.

NOTES

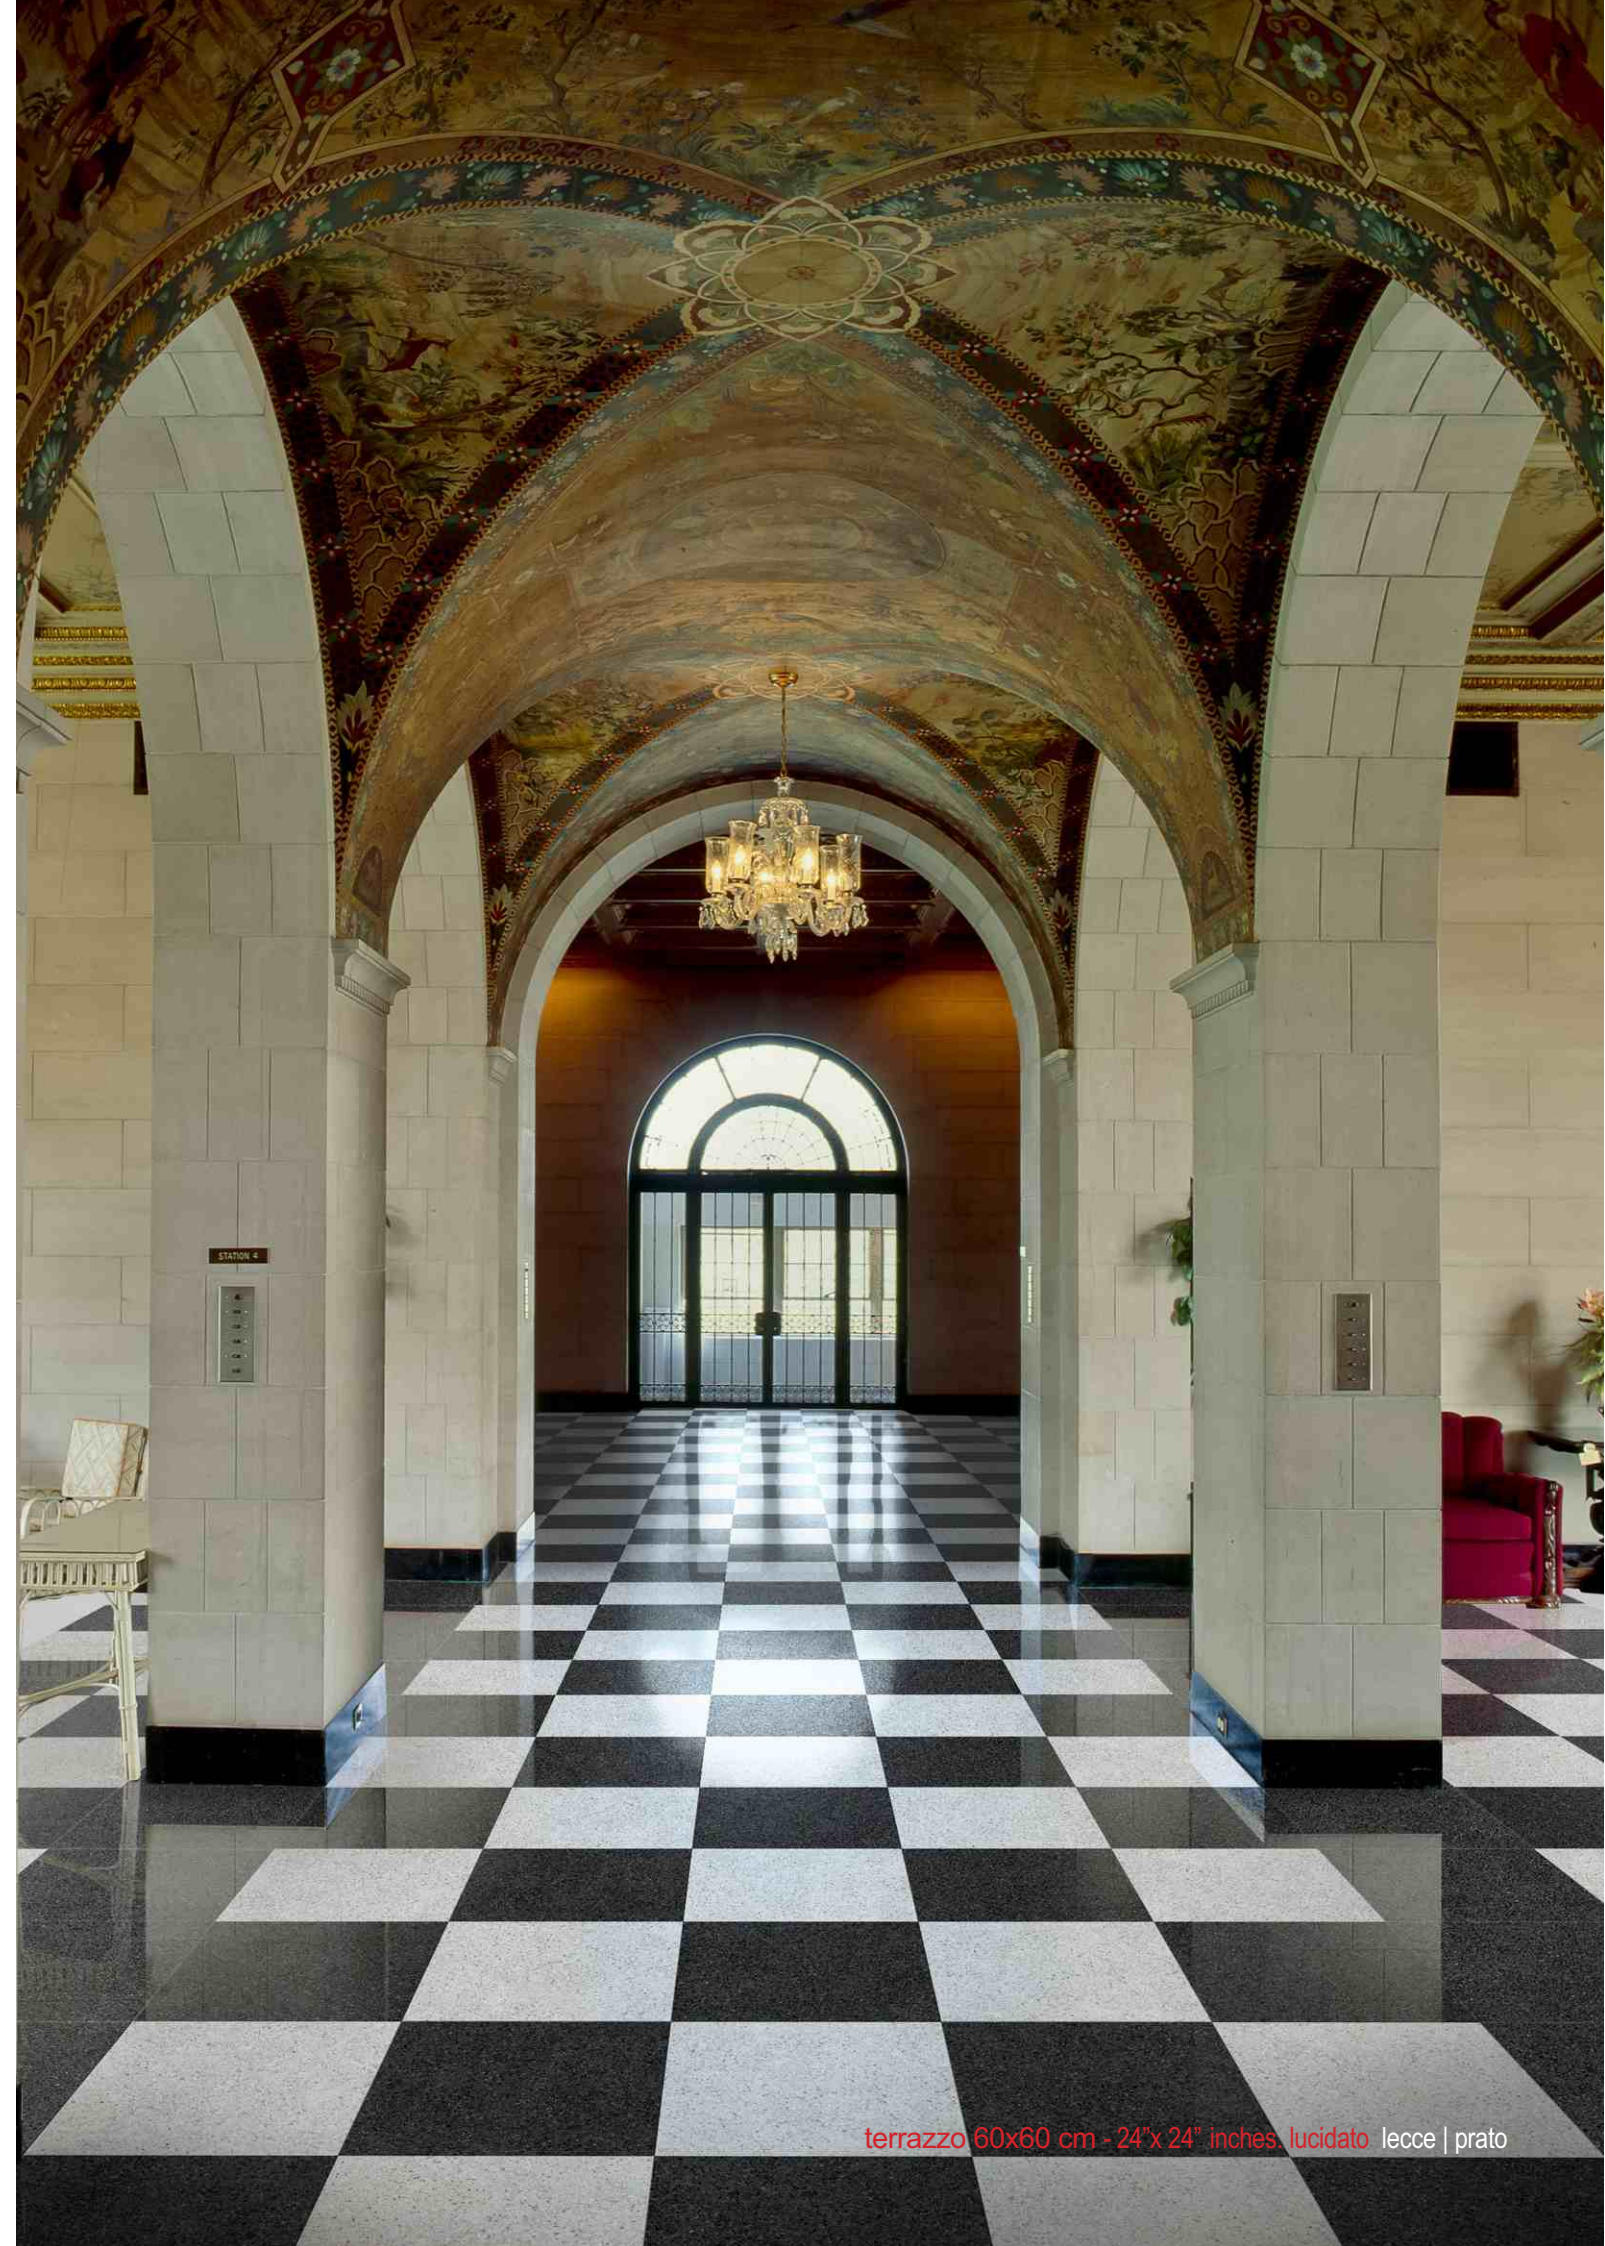

terrazzo 60x60 cm - 24"x 24" inches, lucidato lecce | prato



info@touchstones.eu
www.touchstones.eu